

# ECW5211-L INDOOR ACCESS POINT



## INTRODUCTION

The ECW5211-L is an enterprise-grade, concurrent dual-band 802.11ac Wave 2 indoor access point, designed specifically for high-density Wi-Fi environments. The ECW5211-L features two 2x2:2 MU-MIMO radios that can each transmit data to multiple clients simultaneously, and together have a combined data rate of up to 1.2 Gbps. Besides, the ECW5211-L's integrated Bluetooth Low Energy (BLE) radio also enables new value-added applications such as indoor location tracking, iBeacon, and other location-based services.

When used with an Edgecore controller, additional value-added applications such as bandwidth control, user authentication, and captive portals can be used to provide an ideal solution for all types of businesses. In addition, one AP can be associated to two controllers for redundancy purpose.

## HIGHLIGHTS

### WI-FI


- Concurrent Dual-Band 2.4 & 5 GHz
- 802.11ac 2x2 MU-MIMO supporting up to 1.2 Gbps data rate
- Support up to 32 ESSIDs.
- Enterprise-Grade Wireless Security

### PHYSICAL

- Wall and ceiling mountable
- High Density Wi-Fi deployment
- 802.3af Power over Ethernet (PoE)
- Gigabit LAN Ethernet port
- Bluetooth Low Energy (BLE)

### MANAGEMENT WITH CONTROLLER

- Captive Portal & Guest Provisioning
- Fast Layer 2/Layer 3 Roaming
- User-based Access Management
  - Bandwidth Control
  - Firewall Policies
  - Routing Policies
- Wi-Fi Monetization

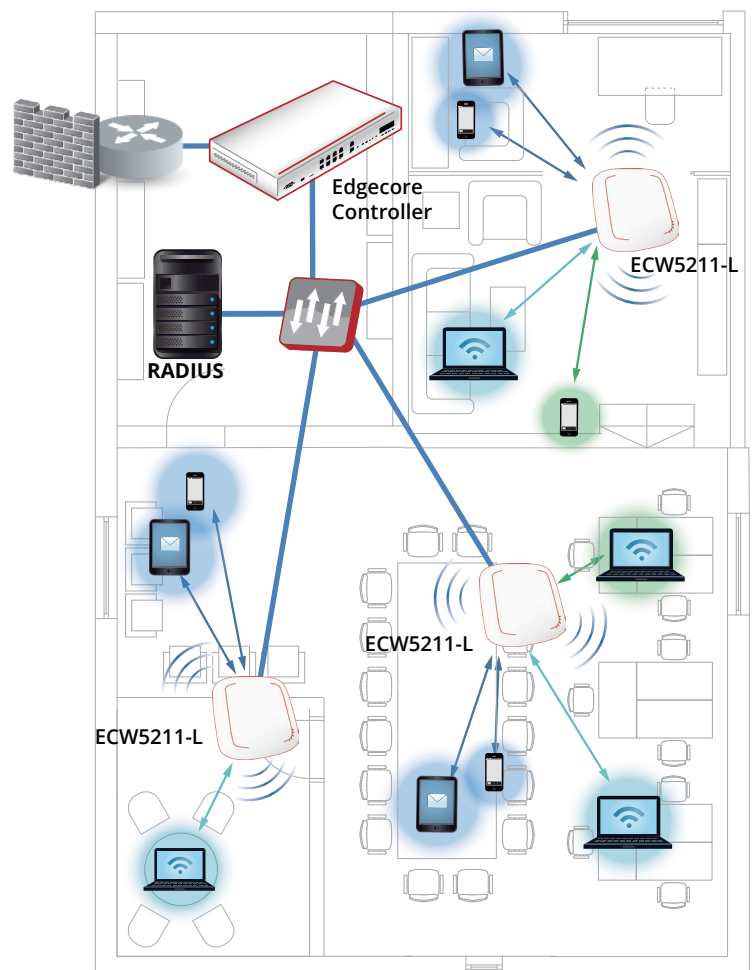

**SPECIFICATIONS**

<b>PHYSICAL</b>	
Power	<ul style="list-style-type: none"> <li>DC Input: 12V / 1.0A (Power adapter optional)</li> <li>PoE: 802.3af compliant (PoE injector optional)</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>14.7 cm (L) x 14.7 cm (W) x 3.5 cm (H)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>0.36 kg (0.78 lbs)</li> </ul>
Interfaces	<ul style="list-style-type: none"> <li>Uplink: 1 x 10/100/1000Base-T Ethernet, Auto MDIX, RJ-45 with 802.3af PoE</li> <li>LAN: 1 x 10/100/1000Base-T Ethernet, Auto MDIX, RJ-45</li> <li>USB: 1 x USB 2.0 Port</li> </ul>
LED Indicator	<ul style="list-style-type: none"> <li>Power / 2.4G-WiFi / 5G-WiFi / Eth1 / Eth2</li> </ul>
Buttons	<ul style="list-style-type: none"> <li>Restart / Reset</li> </ul>
Environmental Conditions	<ul style="list-style-type: none"> <li>Operating Temperature: 0°C (32°F) to 50°C (122°F)</li> <li>Operating Humidity: 5% to 95% non-condensing</li> </ul>
Power Consumption	<ul style="list-style-type: none"> <li>11W max.</li> </ul>
Antenna	<ul style="list-style-type: none"> <li>Type: 3 x Built-in PIFA (2 x 2.4 GHz &amp; 5 GHz, 1 x Bluetooth Low Energy)</li> <li>Gain: 3 dBi (2.4 GHz), 5 dBi (5 GHz), 3 dBi (BLE)</li> </ul>
Mounting	<ul style="list-style-type: none"> <li>Wall/Ceiling mount (Mounting kit included)</li> <li>Anti-theft: 1 Kensington Lock hole on the metal part of housing</li> </ul>

<b>WI-FI</b>	
Standards	<ul style="list-style-type: none"> <li>802.11a/b/g/n/ac ; Wave 2</li> <li>Concurrent dual-band 2.4 &amp; 5 GHz</li> </ul>
Supported Data Rates	<ul style="list-style-type: none"> <li>802.11b: 1, 2, 5.5, 11 Mbps</li> <li>802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11n: 6.5 – 144 Mbps (20 MHz)</li> <li>802.11n: 13.5 – 300 Mbps (40 MHz)</li> <li>802.11ac: 6.5 – 173.4 Mbps (20 MHz)</li> <li>802.11ac: 13.5 – 400 Mbps (40 MHz)</li> <li>802.11ac: 29.3 – 866.6 Mbps (80 MHz)</li> </ul>
Radio Chains	<ul style="list-style-type: none"> <li>2 x 2</li> </ul>
Spatial Streams	<ul style="list-style-type: none"> <li>2; MU-MIMO support</li> </ul>
RF Output Power*1	<ul style="list-style-type: none"> <li>2.4 GHz: Up to 21 dBm*2</li> <li>5 GHz: Up to 20 dBm*2</li> </ul>
Channelization	<ul style="list-style-type: none"> <li>20 MHz</li> <li>40 MHz</li> <li>80 MHz</li> </ul>
Frequency Band	<ul style="list-style-type: none"> <li>2.412 – 2.472 GHz</li> <li>5.180 – 5.825 GHz</li> </ul>
Operating Channels	<ul style="list-style-type: none"> <li>2.4 GHz: 1 – 11 (US), 1 – 13 (Europe), 1 – 13 (Japan)</li> <li>5 GHz*3: 36 – 165 (US), 36 – 140 (Europe), 36 – 140 (Japan)</li> </ul>
ESSIDs	<ul style="list-style-type: none"> <li>Up to 16 per radio (32 total)</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>Wi-Fi CERTIFIED (Wi-Fi Alliance), FCC (United States), CE (Europe)</li> </ul>

<b>PERFORMANCE</b>	
Physical Data Rate	<ul style="list-style-type: none"> <li>Up to 300 Mbps (2.4 GHz)</li> <li>Up to 867 Mbps (5 GHz)</li> </ul>
Concurrent Users	<ul style="list-style-type: none"> <li>Up to 256 (128 on 2.4 GHz, 128 on 5 GHz)</li> </ul>

\*1: RF output power aggregates across MIMO chains and doesn't contain antenna gain

\*2: Maximum power is limited by local regulatory requirements

\*3: Some channels are restricted by local regulatory requirements

## QUALITY OF SERVICE

- Wireless QoS (802.11e/WMM)
- DSCP (802.1p)
- Airtime Fairness
- Band Steering
- Multicast to Unicast Conversion
- Optimal Client Filtering

## MANAGEMENT

Deployment	<ul style="list-style-type: none"> <li>♦ Standalone</li> <li>♦ Tunneled management by Controller</li> <li>♦ IPv4 &amp; IPv6 compatible</li> <li>♦ LLDP</li> </ul>
Configuration	<ul style="list-style-type: none"> <li>♦ Web User Interface (HTTP/HTTPS)</li> <li>♦ SNMP v1, v2c, v3</li> </ul>

## SECURITY

- |                                     |   |
|-------------------------------------|---|
| Wireless Security                   | <ul style="list-style-type: none"> <li>♦ 802.11i</li> <li>♦ WEP</li> <li>♦ WPA/WPA2 Mixed (TKIP/AES Mixed)</li> <li>♦ WPA2-Personal (AES)</li> <li>♦ WPA2-Enterprise (AES)</li> </ul> |
| 32 VLANs in 802.1Q (VLAN ID 1~4000) |   |
| Station Isolation                   |   |
| DHCP Snooping                       |   |
| Layer-2 Firewall                    |   |

## MOBILITY/ROAMING

- Layer 2/Layer 3 Fast Roaming
- Hotspot 2.0

## RECEIVE SENSITIVITY

Operating Mode	Data Rate	Receive Sensitivity (dBm)
802.11b	1 Mbps	-95
	11 Mbps	-86
802.11a	6 Mbps	-87
	54 Mbps	-70
802.11g	6 Mbps	-89
	54 Mbps	-72
802.11n (HT20)	MCS0	-88
	MCS7	-67
	MCS8	-88
	MCS15	-67
802.11n (HT40)	MCS0	-85
	MCS7	-66
	MCS8	-85
	MCS15	-66
802.11ac (VHT20)	MCS0	-86
	MCS8	-64
802.11ac (VHT40)	MCS0	-83
	MCS9	-61
802.11ac (VHT80)	MCS0	-81
	MCS9	-57